


Ordering Information

Body Style Material	Size	Model Number	Max. W.P.	Trim Size	Full Open		Part Numbers		Weight
					Cv	Cg	Taper		
							416 S.S.*	Carbide	
Series 418 Threaded Globe A-395 Ductile	1"	DSG-160-418	6000 psi	1/4"	1.8	52	80004316	80004311	45
				3/8"	4.0	116	80004320	80004310	
				1/2"	6.5	186	80004312	80004314	
				**3/4"	14.1	409	80004330	--	
				1"	20.5	549	80004429	--	
	2"	DSG-240-418	4000 psi	1/4"	1.8	52	80004416	80004417	65
				3/8"	4.0	116	80004441	80004418	
				1/2"	6.4	186	80004445	80004446	
				3/4"	14.1	409	80004421	80004426	
				1"	20.5	549	80004429	--	
Series 420 Threaded Globe Steel WCB	1"	DSG-160-420	6000 psi	1/4"	1.8	52	80004338	80004339	50
				3/8"	4.0	116	80004343	80004344	
				1/2"	6.5	186	80004348	80004349	
				**3/4"	14.1	409	80004356	--	
				1"	20.5	549	80004480	--	
	2"	DSG-260-420	6000 psi	1/4"	1.8	52	80004456	80004457	65
				3/8"	4.0	116	80004461	80004462	
				1/2"	6.4	186	80004466	80004467	
				3/4"	14.1	409	80004476	80004477	
				1"	20.5	549	80004480	--	
Series 420 Threaded Angle Steel WCB	1"	DSA-160-420	6000 psi	1/4"	1.8	52	80004242	80004205	45
				3/8"	4.0	116	80004246	80004206	
				1/2"	6.5	186	80004207	80004250	
				3/4"	14.1	409	80004257	--	
				1"	20.5	549	80004294	--	
	2"	DSA-230-420	3000 psi	1/4"	1.8	52	80004270	80004271	54
				3/8"	4.0	116	80004275	80004218	
				1/2"	6.4	186	80004280	80004281	
				3/4"	14.1	409	80004290	80004291	
				1"	20.5	549	80004294	--	

*416 Hardened Stainless Steel

**3/4" Trim in 1" Valve is limited to 3000 psi Max. Diff. Pressure.

Trim Characteristics

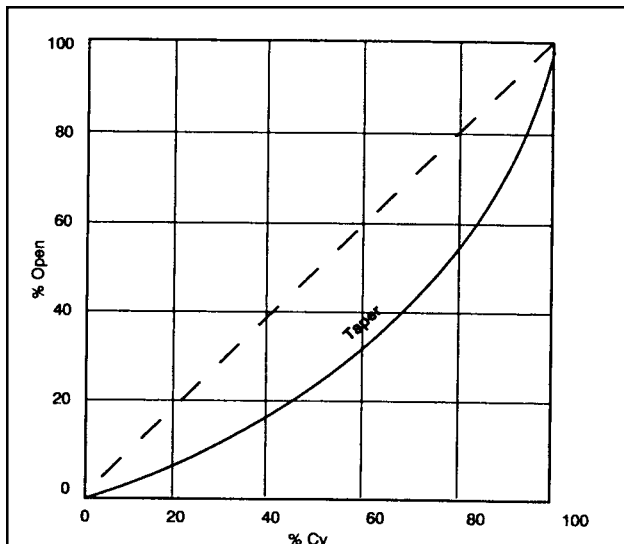

Trim Styles

